

RX10K & RX10KL (std, PS & IS)

Surface Mount Lift Rack

HUNTER
Engineering Company

SPECIFICATIONS



RX10KLIS Shown

Site Specifications

Power Requirements	208-230 VAC, single phase power, 26 Amp
Air Supply Requirements	130-150 PSI (9-10.3 bar)
Minimum Concrete Spec.	3 in. (76 mm) thick, 3000 PSI (20,700 kPa) rating
Maximum Floor Slope	2 in. (51 mm) over 126 in. (3200 mm)

Product Specifications	RX10K	RX10KL
Max Vehicle Weight	10,000 lbs. (4500 kg)	
Max Wheelbase		
General Service	171 in. (4343 mm)	184 in. (4673 mm)
Two-Wheel Alignment	166 in. (4216 mm)	179 in. (4547 mm)
Four-Wheel Alignment	158 in. (4013 mm)	158 in. (4013 mm)


Alignment Height	All lock positions
Min. Four-Wheel Alignment	88 in. (2235 mm)
Lifting Speed	1 speed, 55 seconds
Lowering Speed	2 speed, 25 seconds

MODEL FEATURES / DIMENSIONS / OPTIONS

Feature	std	PS	IS
6000-lb Swing Air Jacks (2)	✓	✓	✓
Two-Speed Lowering	✓	✓	✓
FIA Fully Integrated Alignment		✓	✓
POWER SLIDE		✓	✓
INFLATION STATION			✓

Dimension	
Length (L)	
All RX10K Models	- 241.25 in. (6128 mm)
All RX10KL Models	- 254.25 in. (6458 mm)
Elevated Length (L2)	
All RX10K Models	- 217.25 in. (5518 mm)
All RX10KL Models	- 230.25 in. (5848 mm)
Outside Width (W1)	88.5 in. (2248 mm)
Inside Width (W2)	40 in. (1016 mm)
Runway Width (R)	24 in. (610 mm)
Raised Height (H1)	72 in. (1829 mm)
Depth (H2)	8.75 in. (222 mm)

Options	Add Length	Kit #
Approach Ramp Extensions (Back)	18 in. 457 mm	20-3113-1
Approach Ramp Extensions (Back)	50 in. 1270 mm	20-2189-1
Conventional Sensor Extensions (Front)	12 in. 305 mm	20-2497-1
Drive-Thru Kit (Front)	53 in. 1346 mm	20-2498-1

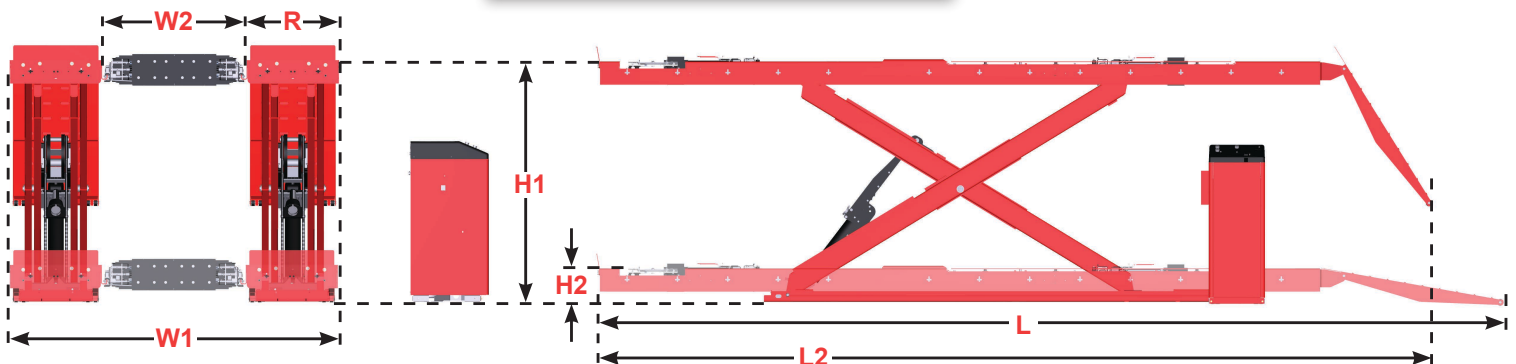

Continued on Page 2

For lift rack information visit:
www.hunter.com/rack

For general inquiries visit:
www.hunter.com
or call
800-448-6848


For local contact visit:
www.hunter.com/company/findrep.cfm

RX10K & RX10KL (std, PS & IS)

Surface Mount Lift Rack

HUNTER
Engineering Company.

SPECIFICATIONS

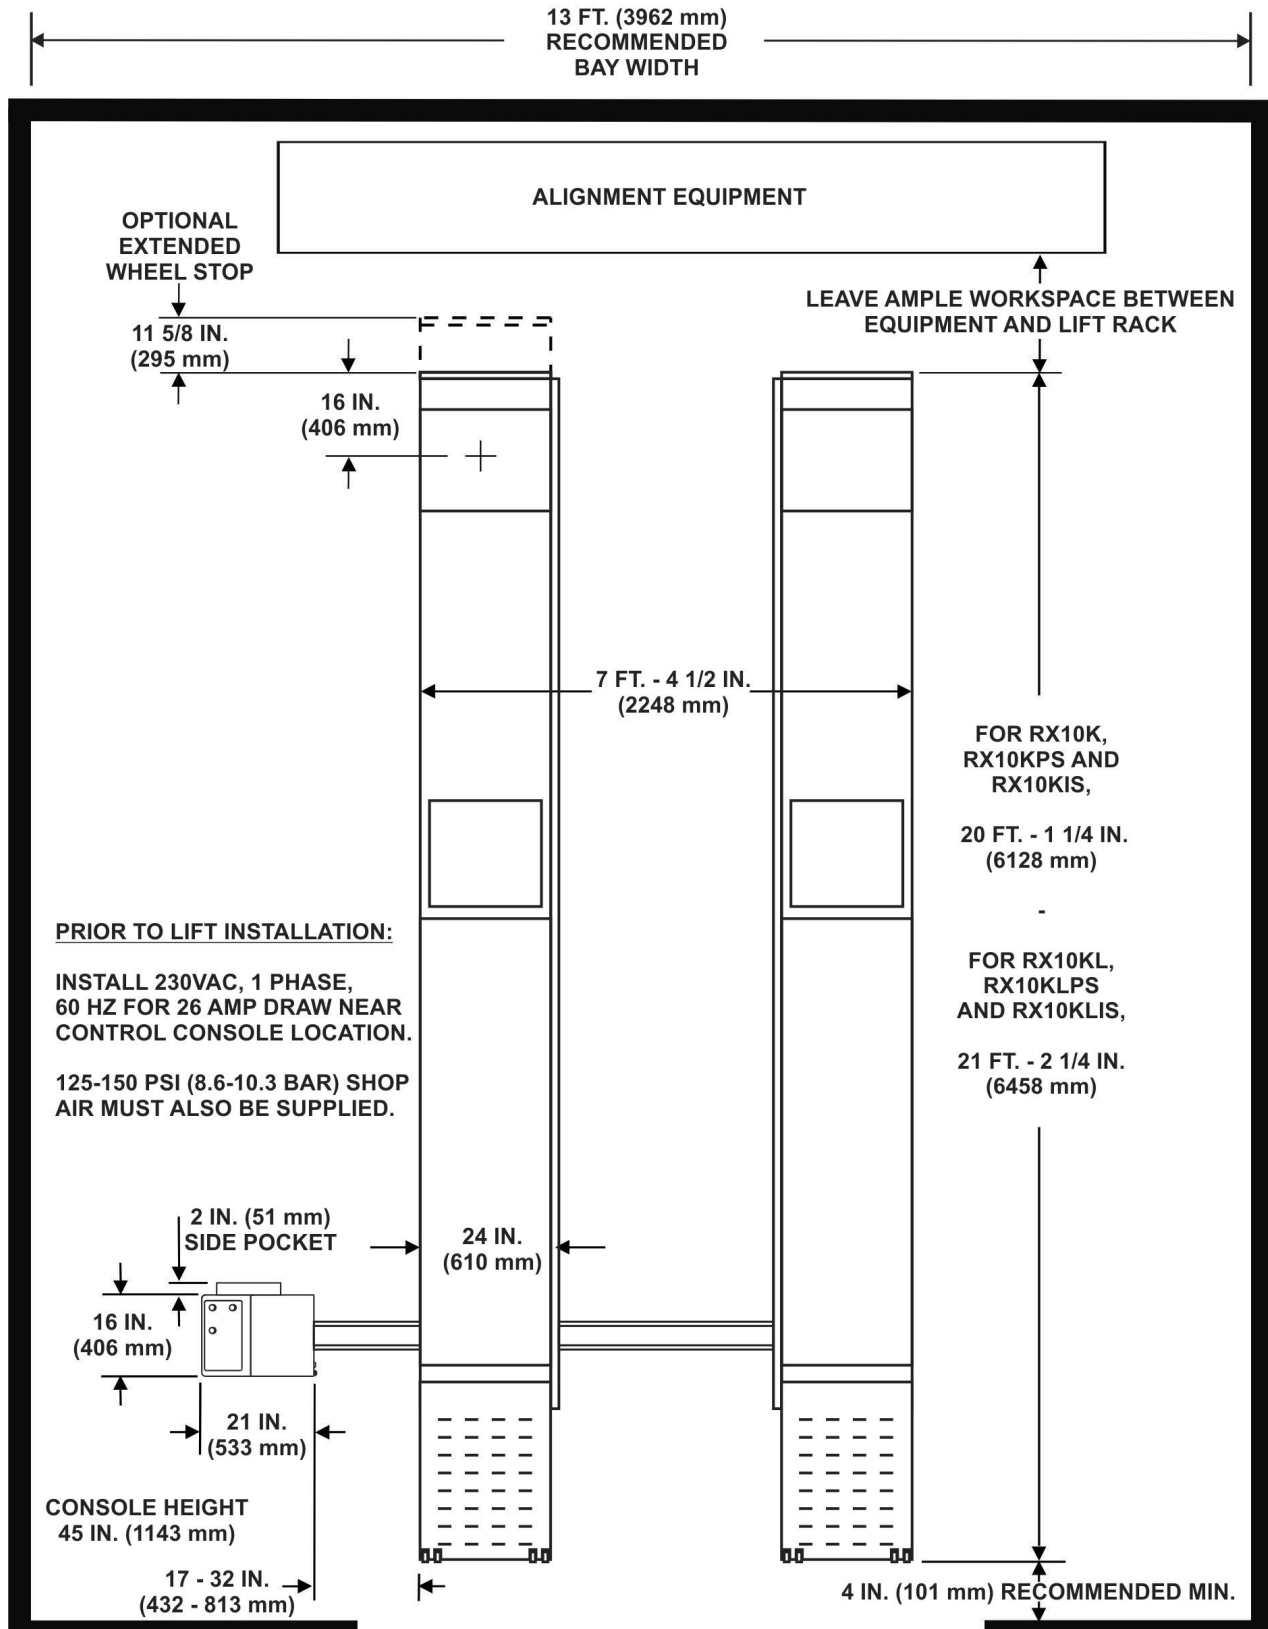

*Non-standard positioning of control console is limited to a maximum space between console and rack of 6 feet (1829 mm) at the approach ramp end and 16 1/2 feet (5029 mm) at the turnplate end. Additional threshold will be required (refer to Installation Instruction for details).