

SITE REQUIREMENTS




Maverick w/ Optional Wheel Lift



TCM	
Power Requirements	208-230 VAC, 1 Ph, 3 kW. NEMA L6-20 plug provided
Air Supply Requirements	125 ± 25 psi (8.6 ± 1.7 bar)
Weight	TCM: 1065 lbs (483kg) / TCMW: 1132 lbs (513kg)
Width (W)	53 in. (1346 mm)
Height (H)	77 in. (1956mm)
Depth (D1 / D1W)	46 in. (1168 mm) / 57 in. (1448mm)
Depth (D2 / D2W)	60 in. (1524mm) / 71 in. (1803mm)

KEY SPECIFICATIONS

TCM	
Mount / Demount Tool	Polymer Leverless
Clamping Type	Center w/ Quick Clamp
Bead Loosening Type	Upper / Lower Roller
Match Mounting Capable	Yes
Rim Diameter Range	10 in. - 34 in. (254 mm - 863 mm)
Maximum Tire Diameter	50 in. (1,270 mm)
Maximum Wheel Width	19 in. (381 mm)
Drive	Variable up to 17 rpm CW / CCW Torque: 700 ft-lbs (949 Nm)

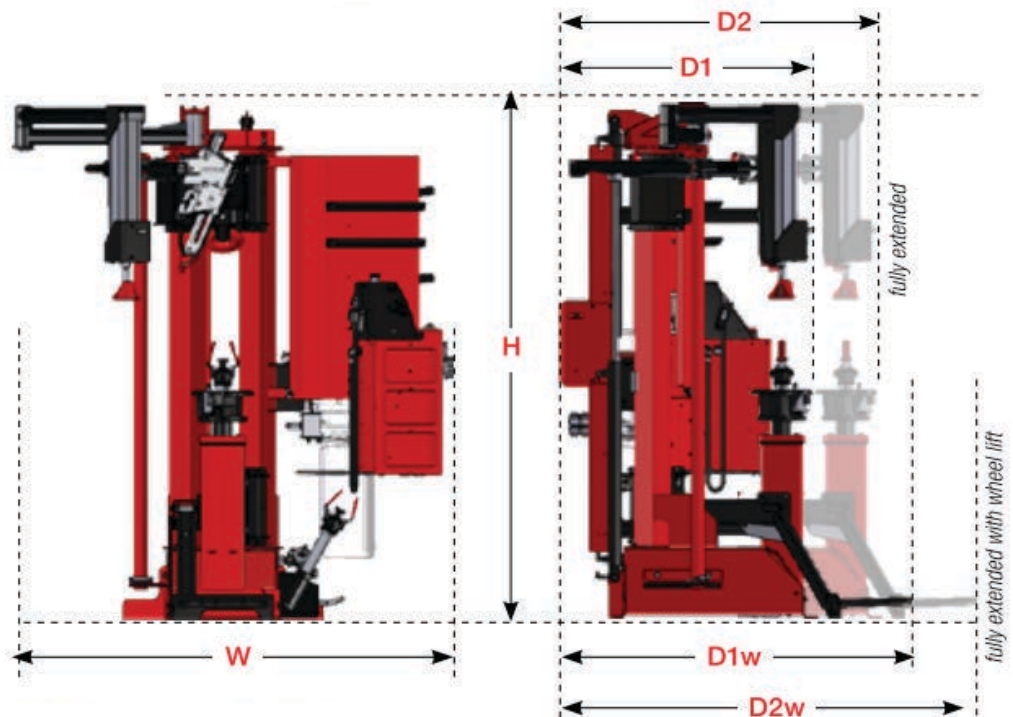

For tire changer information visit:
www.hunter.com/tire-changers

For local contact visit:
www.hunter.com/company/contact-hunter

For general inquiries visit:
www.hunter.com or call 800-448-6848